

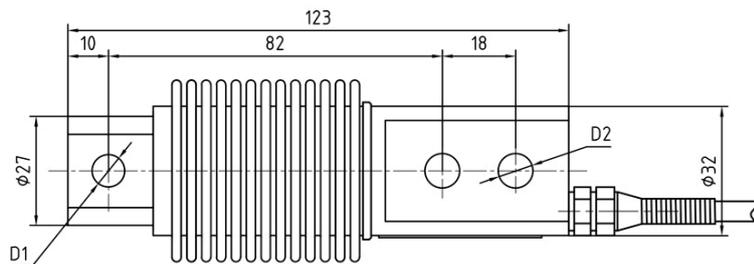


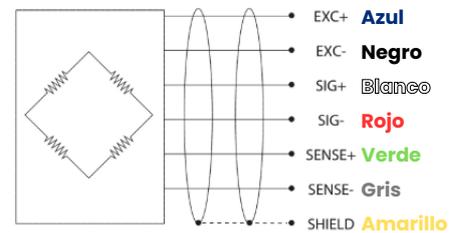

Dimensiones | Plano

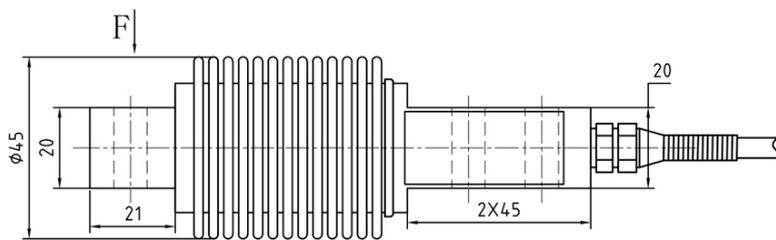

Capacidade (kg)	D1	D2
10 — 200	Ø8.2	Ø8.2
500	Ø11.1	Ø10.5

Ficha Técnica

Rated load	kg	10	20	50	100	200	500
Sensitivity	mV/V	2,0 ± 0.002					
Accuracy class	-	G3*					
Creep (30 minutos)	%F.S	± 0,02					
Zero balance		± 1					
TC ZERO	%F.S/ 10°C	± 0,02					
TC SPAN		± 0,02					
Input resistance	Ω	400 ± 20					
Output resistance		352 ± 5					
Insulation resistance	MΩ (50 VDC)	≥ 5000					
Nominal Temp Range	°C	-10 — +40					
Service Temp Range		-30 — +70					
Maximum Sava overload	%F.S	150					
Ultimate overload		200					
Recommend excitation	VDC	5 — 12					
Maximum excitation		15					
Protection Class	-	IP68					
Material	-	Stainless Steel					
Cable	-	Length:12m Diameter: Ø5mm					